



TECHNICAL SHEET

PACKAGED PRODUCTS AVANTAPURE SOFTENER






TECHNICAL SHEET



AVANTAPURE SOFTENER

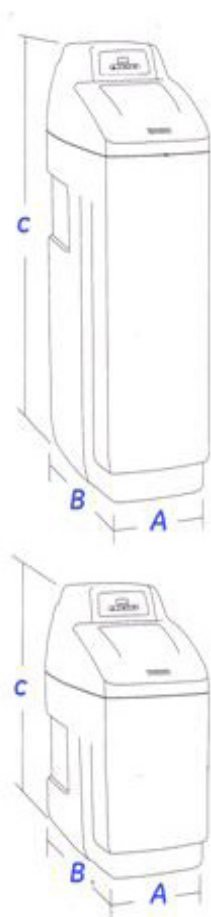

TECHNICAL CHARACTERISTICS

- Test pressure: 7 bar
- Operating pressure: 3-4 bar
- Minimum operating pressure: 1.5 bar
- Supply voltage: 220 VAC – 50 Hz transformed to 24 VAC
- Minimum temperature: 4°C
- Maximum temperature: 40°C
- Parts' materials:
 - Valve: Noryl
 - Tank: Fiber-reinforced polyethylene
 - Resin: Acid cationic strong at high exchange capacity
 - Cover: HD polyethylene

STANDARD ACCESSORIES

- Mixer for residual hardness
- Safety brine valve to prevent overflows
- Manual bypass for rapid connection to the water network

AVANTAPURE SOFTENER

Model Number	Connections	Flow rate (m ³ /h)	Resin quantity (Liter)	Cycles (m ³ /°F)		Cycles at 30°F		Salt consumption (kg)		Dimensions (mm)			Weight (kg)
				MEAN	MAX	MEAN	MAX	MEAN	MAX	A	B	C	
GE Avantapure 8	1"	1.5	8	40	48	1.3	1.6	1.6	2.5	300	550	650	22
GE Avantapure 15	1"	1.8	15	75	90	2.5	3	2.7	3.7	300	550	1100	35
GE Avantapure 30	1"	2.4	30	125	150	4.1	5	4.5	6.3	300	550	1100	50

All components of the AvantaPure softener by GE are non-toxic and suitable for the residential treatment of drinking water.

contact: techsupport.water@pentair.com